



10/521260  
Rec'd PCT/PTO 13 JAN 2005  
CT/IB 03/03028  
08.07.03



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 06 AUG 2003


WIPB PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

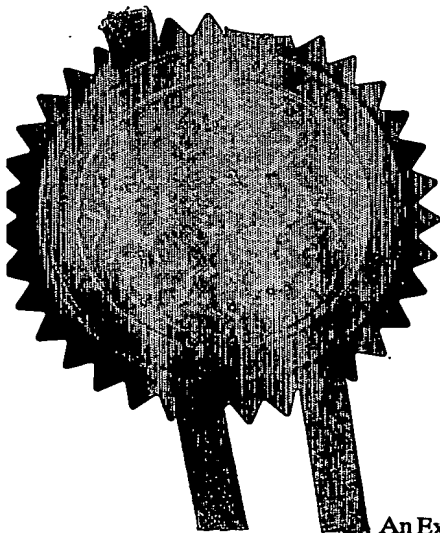

Signed *He Behen*

Dated 7 May 2003

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The  
Patent  
Office

□□□□

1/77

## Request for grant of a patent

See notes on the back of this form. You can  
so get an explanatory leaflet from the Patent  
Office to help you fill in this form)

THE PATENT OFFICE

18 JUL 2002

NEWPORT

The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

Your reference

PHGB020115

Patent application number  
(The Patent Office will fill in this part)

18 JUL 2002

0216703.9

18JUL02 E734310-1 D03008  
P01/7700 0.00-0216703.9

Full name, address and postcode of the or of  
each applicant (underline all surnames)

07419294001

Patents ADP Number (if you know it)

KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS

If the applicant is a corporate body, give the  
country/state of its incorporation

THE NETHERLANDS

Title of the invention

RECEIVER HAVING <sup>A</sup>VARIABLE THRESHOLD SLICER STAGE

Name of your agent (if you have one)  
"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

Kevin James SCOTT  
Philips Intellectual Property and Standards  
Cross Oak Lane  
Redhill  
Surrey RH1 5HA

Patents ADP number (if you know it)

07688914001

If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (if you know it) the or  
each application number

Country

Priority Application number  
(if you know it)

Date of filing  
(day/month/year)

If this application is divided or otherwise  
derived from an earlier UK application, give  
the number and the filing date of the earlier  
application

Number of earlier application

Date of filing  
(day/month/year)

Is a statement of inventorship and of right to  
grant of a patent required in support of this  
request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an  
applicant, or  
c) any named applicant is a corporate body.  
See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description  
Claims(s)  
Abstract  
Drawings

8

3

1

2

0. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

1.

I/We request the grant of a patent on the basis of this application.

Signature



Date

16<sup>th</sup> July 2002

2. Name and daytime telephone number of person to contact in the United Kingdom

01293 815281

(Kevin J. Scott)

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.


For details of the fee and ways to pay please contact the Patent Office.

The  
Patent  
Office  
□□□□

1/77

## Request for grant of a patent

See notes on the back of this form. You can  
also get an explanatory leaflet from the Patent  
Office to help you fill in this form)

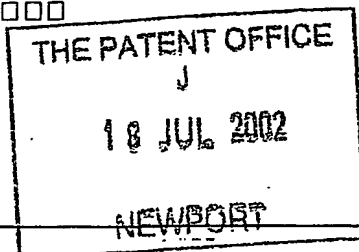

The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

Your reference

PHGB020115

Patent application number  
(The Patent Office will fill in this part)

18 JUL 2002

0216703.9

18JUL02 E734310-1 D03008  
P01/7700 0.00-0216703.9

Full name, address and postcode of the or of  
each applicant (*underline all surnames*)

KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS

07419294001

Patents ADP Number (*if you know it*)

If the applicant is a corporate body, give the  
country/state of its incorporation

THE NETHERLANDS

Title of the invention

A  
RECEIVER HAVING VARIABLE THRESHOLD SLICER STAGE  
^

Name of your agent (*if you have one*)  
"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(*including the postcode*)

Kevin James SCOTT  
Philips Intellectual Property and Standards  
Cross Oak Lane  
Redhill  
Surrey RH1 5HA

Patents ADP number (*if you know it*)

07688914001

If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (*if you know it*) the or  
each application number

Country

Priority Application number  
(*if you know it*)

Date of filing  
(*day/month/year*)

If this application is divided or otherwise  
derived from an earlier UK application, give  
the number and the filing date of the earlier  
application

Number of earlier application

Date of filing  
(*day/month/year*)

Is a statement of inventorship and of right to  
grant of a patent required in support of this  
request? (*Answer "Yes" if:*

YES

- a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an  
applicant, or  
c) any named applicant is a corporate body.  
See note (d))

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description  
Claims(s)  
Abstract  
Drawings

8

3

1

2

1. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

I/We request the grant of a patent on the basis of this application.

Signature



Date

16<sup>th</sup> July 2002

2. Name and daytime telephone number of person to contact in the United Kingdom

01293 815281

(Kevin J. Scott)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

**RECEIVER HAVING A VARIABLE THRESHOLD SLICER STAGE**

5       The present invention relates to a receiver having a variable threshold slicer stage. The present invention has particular, but not exclusive, application to FSK receivers such as may be used in accordance with the Bluetooth standard.

10       Unpublished PCT patent application IB01/02707 (Applicant's reference PHGB 010002) relates to such a receiver. Figure 1 of the accompanying drawings shows a simplified block schematic diagram of a GFSK receiver having a variable threshold slicer as disclosed in this prior patent application. The GFSK receiver comprises a rf front end 10 having an input coupled to an  
15       antenna 12 and an output coupled to a demodulator 14 which may be digital or analogue depending on the architecture of the receiver. An integrate and dump stage 18 is coupled to an output of the data filter 16 and to an input of a variable threshold slicer 20 which has an output 34 for the detected bits.

20       The integrate and dump stage 18 comprises two alternately reset integrate and dump stages 18A, 18B which are able to provide a signal every bit period, which signal is based on the digital signal values over the two preceding bit periods. A switch 40 is toggled every bit period to connect alternately the outputs of the stages 18A, 18B to the input 24 of the slicer 22.

25       A master clock 42 provides a clock signal having a frequency which is a multiple of the bit rate. Timing synchronisation of the clock signal with the output of the demodulator 14 is effected in a synchronising stage 44. The stage 44 is coupled to a toggle every bit stage 46 having a first output 48 coupled to the switch 40 and a second output 50 coupled to a reset every 2 bits stage 52. The stage 52 is coupled firstly to a reset input of the integrate  
30       and dump stage 18A and secondly to a one bit delay stage 54 whose output is coupled to a reset input of the integrate and dump stage 18B. The provision of

the delay stage 54 enables the stages 18A and 18B to be alternately reset every bit period.

The variable threshold slicer 20 comprises a slicer or comparator 22 having a first input 24 for a signal  $S_n$  from the integrate and dump stage 18 and a second input 26 for one of four threshold levels as selected by a threshold level selector 28 implemented as a four position switch having positions  $P_1$  to  $P_4$ . An output of the slicer 22 is coupled to two series connected one bit delay stages 30, 32, an output 33 of the latter being connected to the output terminal 34. The bit  $B_n$  on the output of the slicer 22 represents the current bit, and the bits  $B_{n-1}$  and  $B_{n-2}$  on outputs 31, 33, respectively, are the two immediately preceding bits delayed by one bit and two bit intervals, respectively. The values of these two immediately preceding bits  $B_{n-1}$ ,  $B_{n-2}$  are used to select the particular threshold level  $T_n$  to be applied to the input 26 of the slicer 22. The following truth table indicates how the binary values of  $B_{n-1}$ ,  $B_{n-2}$  determine the position of the level selector 28.

$B_{n-2}$	$B_{n-1}$	Switch Position
1	1	$P_1$
0	1	$P_2$
1	0	$P_3$
0	0	$P_4$

Thus the values of the two bits preceding the current bit  $B_n$  determine the present threshold level.

The values of the threshold levels are provided by a threshold estimating stage 36. The stage 36 comprises a four position threshold selector switch 38 comprising, for convenience of reference, positions  $P_1$  to  $P_4$  which correspond to the threshold positions of the selector 28. The input signal to the switch 38 comprises the signal  $S_n$  from the integrate and dump stage 18. Long time constant integrators 401, 411, 421 and 431 having a time constant of the order of, or greater than, one thousand bits to reduce the effects of noise are connected respectively between positions  $P_1 - P_1$ ,  $P_2 - P_2$ ,  $P_3 - P_3$ ,  $P_4$

-  $P_4$  of the stages 36 and 28 to provide the four mean threshold levels  $L_{11}$ ,  $L_{01}$ ,  $L_{10}$ ,  $L_{00}$ , respectively. The position determined by the switch 38 is also selected by the values of the bits  $B_{n-2}$  and  $B_{n-1}$ . Thus the threshold level being applied to the input 26 of the slicer 22 is also the level which is being updated  
5 by the signal  $S_n$ .

ISI (Intersymbol Interference) causes the current bit  $B_n$  to be affected by adjacent bits. For GMSK modulation with a BT of 0.5, the previous bit  $B_{n-1}$  is dominant,  $B_{n-2}$  has some effect and  $B_{n-3}$  has very little effect. For each bit decision, a slicer threshold is chosen that is positive if the net effect of the ISI  
10 caused by the previous sequence of bits produces a positive bias and is negative if there is a negative bias. In Figure 1, only the last two preceding bits  $B_{n-1}$  and  $B_{n-2}$  are needed to choose thresholds with sufficient resolution. The slicer 20 chooses a threshold according to the history of the previous two bits, that is, whether the last two detected bits were 11, 01, 10 or 00. Thus  
15 each bit decision requires the selection of one of only four thresholds.

The output of the digital demodulator 14 is a time-discrete waveform with an amplitude representing the GFSK modulated data. In practice the demodulated signal is sampled at, say, 20 times the data rate, and each bit will be overspread to adjacent bits due to ISI. To analyse this information, an  
20 integration function is used that produces an estimate of the change in phase dominated by that caused by the latest bits. The integrate and dump stage 18 has a hold function, whereby the output of an integrator is held at the end of a period of two bits and is then reset.

The signal which is sliced is the demodulated signal which has been  
25 integrated and held over the last few bits. In doing this the integration must be performed over a specific portion of the signal and must therefore be synchronised with the demodulated signal. As timing synchronisation will not be achieved initially it is not possible to use such a variable threshold slicer and the demodulated signal is first sliced with a conventional slicer and the  
30 sliced data used to drive a digital phase lock loop in order to achieve timing synchronisation before the integrators used in the variable threshold slicer can



be started. It is desired to avoid this delay in enabling the variable threshold slicer to become effective.

An object of the present invention is enable a variable threshold slicer to  
5 be able operate freely without prior synchronisation.

According to one aspect of the present invention there is provided a method of determining the values of data bits from a demodulated frequency shift key signal, comprising over-sampling raw data recovered from a demodulated signal, delaying samples of the raw data, combining selected  
10 delayed samples of the raw data to form a sample to be bit sliced, bit slicing the samples to be sliced to produce a bit stream signal, delaying the bit stream signal, using the bit stream signal to recover a clock signal, and using the recovered clock signal to sample the delayed bit stream signal at the data rate to produce detected bits.

According to a second aspect of the present invention there is provided a receiver for use with FSK signals, comprising a demodulator for supplying over-sampled raw data, first delay means for delaying the over-sampled raw data, means for combining selected delayed samples of the raw data to provide samples to be sliced, bit slicing means for producing a bit stream  
20 signal from the samples to be sliced, second delay means for delaying the bit stream signal, clock recovery means coupled to the bit slicing means and bit sampling means coupled to an output of the second delay means and controllable by the clock recovery means to produce detected bits.

25 The present invention will now be described, by way of example with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a GMSK receiver having of the type disclosed in PCT patent application IB01/02707, and

Figure 2 is a block schematic diagram of an embodiment of a receiver  
30 made in accordance with the present invention.

In the drawings the same reference numerals have been used to indicate corresponding features.

Referring now to Figure 2 of the accompanying drawings, in the interests of brevity only the differences between the illustrated embodiment and the known embodiment of Figure 1 will be described.

5       The signal  $X_n$  from the demodulator 14 is over-sampled in the illustrated embodiment by a factor of 20 times the bit rate. An over-sampling factor of 20 is not intended to be limiting and factors having a lower or higher value could be used as well as other ways to vary the factor for example by adding other samples. The over-sampled signal is applied to a delay line comprising a shift  
10   register 60 having at least 29 stages and which can delay the signal applied to its input by 29 sample periods (or 1.5 bit periods). Outputs are derived from the 9<sup>th</sup> and 10<sup>th</sup> stages 62, 64, corresponding to a time delay of substantially half a bit period, and are added together in an adder 66. The sum is applied to an amplifier 68 which it is multiplied by a gain factor K. An output of the amplifier  
15   68 is applied to a first input of an adder 70.

      An output is derived from the 29<sup>th</sup> shift register stage 72, which corresponds to a delay of substantially one and half bit periods, and is applied to a second input of the adder 70. An output corresponding to an approximation  $\int X_n$  is applied to the input 24 of the bit slicer 22 to generate a  
20   bit stream. An output of the bit slicer 22 is applied to two cascaded shift registers 30, 32 and to a clock recovery circuit 74. In the illustrated embodiment the shift registers 30, 32 have 20 stages but a different number of stages could be used provided each of the shift registers has an overall delay of one bit period. The clock recovery circuit 74, which may comprise a digital  
25   phase locked loop (DPLL), controls a sampling circuit 76 having an input coupled to an output of the second shift register 32 and an output coupled to the output 34 for the detected bits.

      In operation the two cascaded shift registers 30, 32 provide the history of the previous two bits  $B_{n-1}$ ,  $B_{n-2}$  which is used for the selection of the slice  
30   level and for the adjustment of this slice level. These bits  $B_{n-1}$ ,  $B_{n-2}$  are fed back to the threshold circuit 28 without being synchronized to the data rate. The clock recovery circuit 74 is used to sample the output of the second shift

register 32 in the middle of the bit at the data rate and provide a sequence of bits on the output 34.

If it is desired to use the previous bit  $B_{n-3}$  then a further shift register would be cascaded with the shift registers 30, 32. A three bit signal will then be used to select the threshold level  $T_n$ .

In order to reduce the inaccuracy of the raw sliced data  $B_n$ , the following function can be performed:

$$B'_n = \text{Lim}(B_n + Z^{-1} \cdot B_n + Z^{-2} \cdot B_n)$$

where  $Z^{-1}$  and  $Z^{-2}$  are the delays due to the shift registers 30, 32.

Adding three samples and re-slicing removes single-sample oscillations which are most likely to occur when the signal is being sliced at near to the zero crossings. As the mean delay through this function is one sample period, the first bit delay should be reduced by one sample. This averaging should improve the threshold decision process and the clock recovery settling time.

The gain factor  $K$  is applied to the two most recent samples, that is the 9<sup>th</sup> and 10<sup>th</sup> samples present in the stages 62, 64. This alters the integration function, biasing the effect of the last bit relative to the previous bit. This function is already biased twice by having twice samples from the most recent bit, that is as the shift register 60 is clocked, the 9<sup>th</sup> sample in the stage 62 becomes the 10<sup>th</sup> sample in the stage 64, and thereby contributes in two successive sampling periods to the sum formed in the stage 66. This was done because simulations of the circuit showed that this gave the best trade-off between sensitivity and co-channel rejection. Also these simulations suggested that an optimum value for  $K$  would be close to 1. By reducing  $K$  from 1 to 0.8, the simulations showed that there can be made a slight improvement in sensitivity of about 0.2 dB. It has been found that by choosing  $K = 2$  is significantly worse, which would be similar to using two samples from each bit.

In summary during the start-up phase of the receiver circuit the demodulated output is asynchronously over-sampled and selected raw data samples are combined to form an input signal to the slicer 22. The output  $B_n$

from the slicer 22 is applied to the clock recovery circuit 74 which synchronizes the sampling of the recovered data signal to the data rate. Once the clock recovery circuit 74 has synchronized, the bits  $B_{n-1}$ ,  $B_{n-2}$  feedback could be synchronized data. Thereafter the variable threshold circuit 22 will function in accordance with the embodiment as described in Figure 1 of the accompanying drawings or the embodiments described in unpublished PCT patent application IB01/02707 (Applicant's reference PHGB 010002).

The variable threshold slicer shown in Figure 2 is both simpler to implement as well as to operate compared to the circuit shown in Figure 1. Also a separate, conventional slicer is not required for clock recovery, the clock recovery does not have to be done with a fast DPLL (Digital Phase locked Loop) and the overall circuit itself is simpler.

In order to enhance the performance of variable threshold slicers in situations where delay spread due to multipath can cause loss of signal at one deviation of a FSK signal, it has been found beneficial to normalise the amplitude of the signal at the input to the variable threshold slicer in order to achieve optimum bit error rate (BER) when this kind of delay spread occurs. The normalisation may be effected using a circuit which approximates to a 1-tap equaliser. In operation, the gain normalisation can be achieved using the maximum peak-to-peak amplitude value of the signal occurring say during the sync. code word as a reference.

The numerical values given in the description of the embodiment shown in Figure 2 are illustrative and are not intended to be limiting.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use receivers having variable threshold slicer and component parts therefor and which may be used instead of or in addition to features already described

herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or  
5 any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present  
10 application or of any further application derived therefrom.

## CLAIMS

1. A method of determining the values of data bits from a demodulated frequency shift key signal, comprising over-sampling raw data recovered from the demodulated signal, delaying samples of the raw data, combining selected delayed samples of the raw data to form a sample to be bit sliced, bit slicing the samples to be sliced to produce a bit stream signal, delaying the bit stream signal, using the bit stream signal to recover a clock signal, and using the recovered clock signal to sample the delayed bit stream signal at the data rate to produce detected bits.

2. A method as claimed in claim 1, characterised in that samples of the delayed raw data occurring after a delays of substantially half a bit period and one and a half bit periods are combined to form samples to be bit sliced.

3. A method as claimed in claim 1, characterised in that at least two successive samples of the raw data occurring after a delay of substantially half a bit period are added and multiplied by a gain factor and the result is added to at least one sample of raw data occurring after a delay of substantially one and a half bit periods.

4. A method as claimed in claim 3, characterised in that the gain factor has a value of substantially unity.

5. A method as claimed in any one of claims 1 to 4, characterised by normalising the sample to be sliced prior to bit slicing.

6. A receiver for use with FSK signals, comprising a demodulator for supplying over-sampled raw data, first delay means for delaying the over-sampled raw data, means for combining selected delayed samples of the raw data to provide samples to be sliced, bit slicing means for producing a bit stream signal from the samples to be sliced, second delay means for delaying

the bit stream signal, clock recovery means coupled to the bit slicing means and bit sampling means coupled to an output of the second delay means and controllable by the clock recovery means to produce detected bits.

5           7.     A receiver as claimed in claim 6, characterised in that the first delay means comprises shift register means having at least  $3N/2$  stages, where  $N$  is the number of stages corresponding to the over-sampling ratio, and in that outputs from, or in the vicinity of, stages  $N/2$  and  $3N/2$  are applied to the combining means.

10

8.     A receiver as claimed in claim 6, characterised in that the first delay means comprises shift register means having  $3N/2$  stages, where  $N$  is the number of stages corresponding to the over-sampling ratio, and in that the combining means comprises a first adding stage coupled to outputs of two  
15 adjacent shift register stages in the vicinity of stage  $N/2$ , a scaling stage coupled to an output of the first adding stage, a second adding stage having a first input coupled to an output of the scaling stage, a second input coupled to output of a shift register at, or in the vicinity of, the stage  $3N/2$  and an output coupled to the bit slicing means.

20

9.     A receiver as claimed in claim 8, characterised in that the scaling stage has a scaling factor of substantially unity.

10.    A receiver as claimed in claim 7, 8 or 9, characterised in that the  
25 over-sampling ratio equals 20, in that outputs of stages 9, 10 and 29 are applied to the combining means.

11.    A receiver as claimed in any one of claims 6 to 10, characterised  
in that the second delay means comprises first and second delay stages, each  
30 having a delay of substantially one bit period, in that the bit slicing means has means for storing a plurality of threshold values, and means for selecting a

threshold value for comparison with the currently held samples to be sliced in dependence on the bit values at outputs of the first and second delay stages.

12. A method of determining the values of data bits from a  
5 demodulated frequency shift key signal, substantially as hereinbefore described with reference to the accompanying drawings.

13. A receiver for use with frequency shift key signals, constructed and arranged to operate substantially as hereinbefore described with  
10 reference to and as shown in the accompanying drawings.



## ABSTRACT

## RECEIVER HAVING A VARIABLE THRESHOLD SLICER STAGE

5        A receiver having a variable threshold slicer stage, comprises a demodulator (14) for providing asynchronously samples of over-sampled raw demodulated data. A shift register (60) for delays the over-sampled data by up to 2 bit periods. Samples in stages (62,62, 72) corresponding to substantially the mid-points in two successive bit periods are combined to form a signal . . .

10     $(\int X_n)$  to be applied to a bit slicer (22). A bit stream signal from the bit slicer (22) is delayed by concatenated shift registers (30,32) for 2 bit periods and is contemporaneously applied to a clock recovery circuit (74) for producing clock signals corresponding to substantially the middle of the bit for actuating a sampling circuit at the data rate to produce an output bit signal.

15

(Figure 2)

1/2

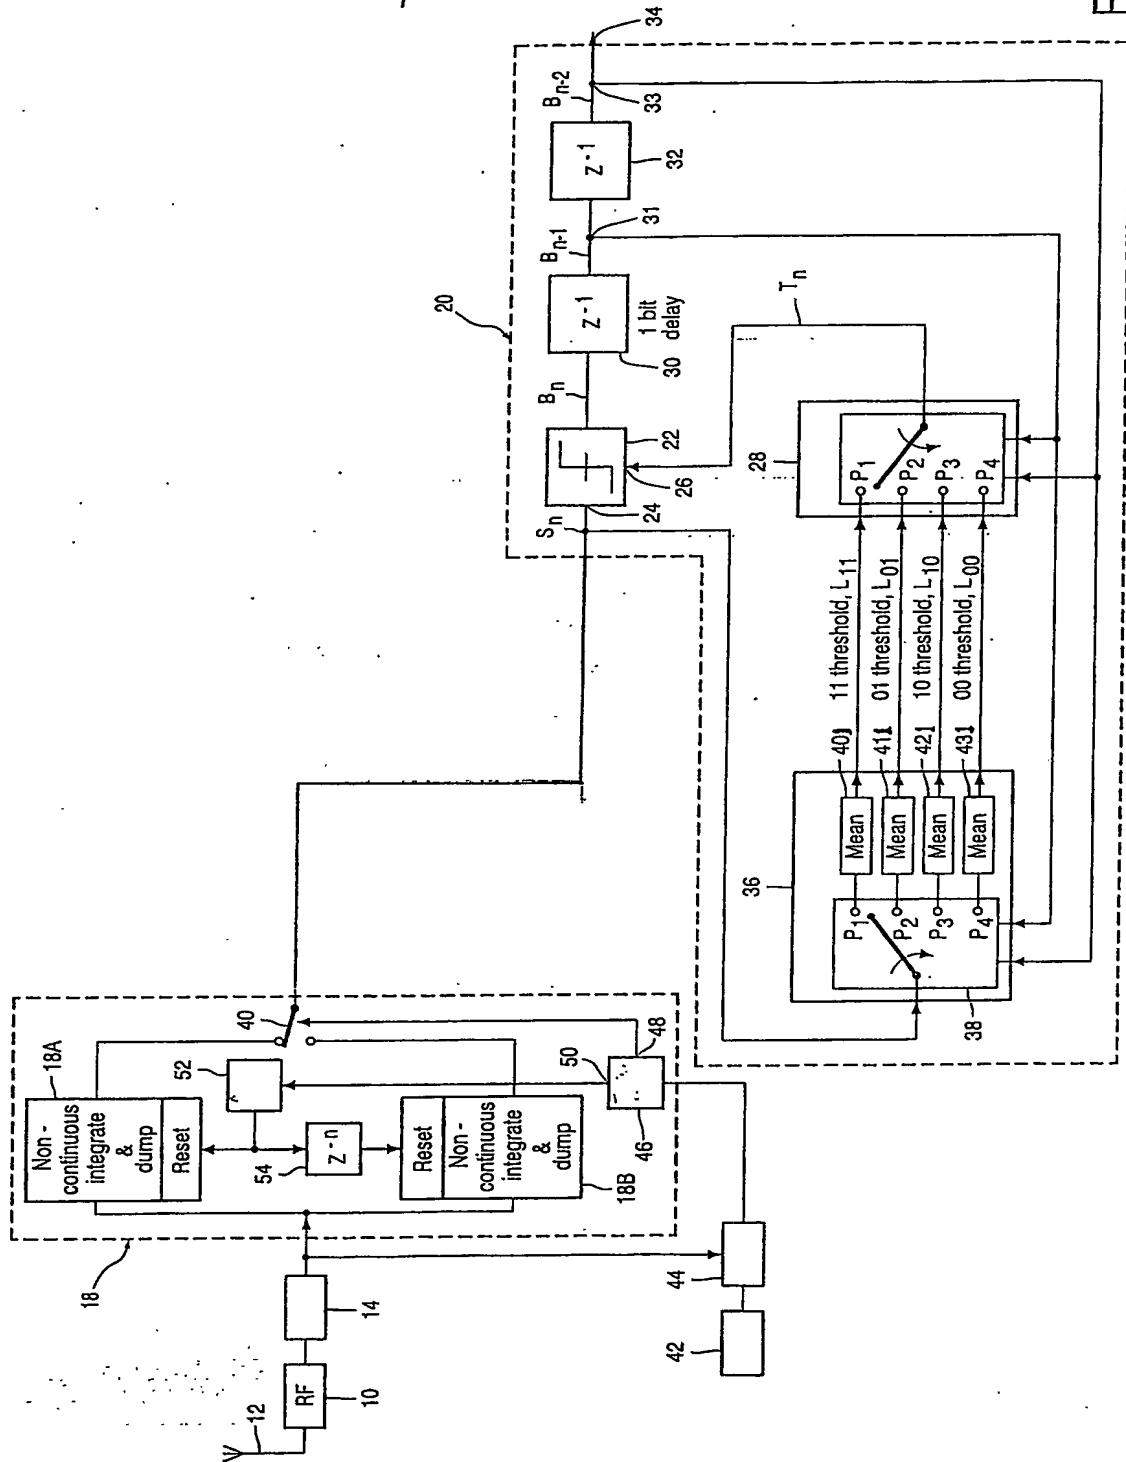


FIG. 1

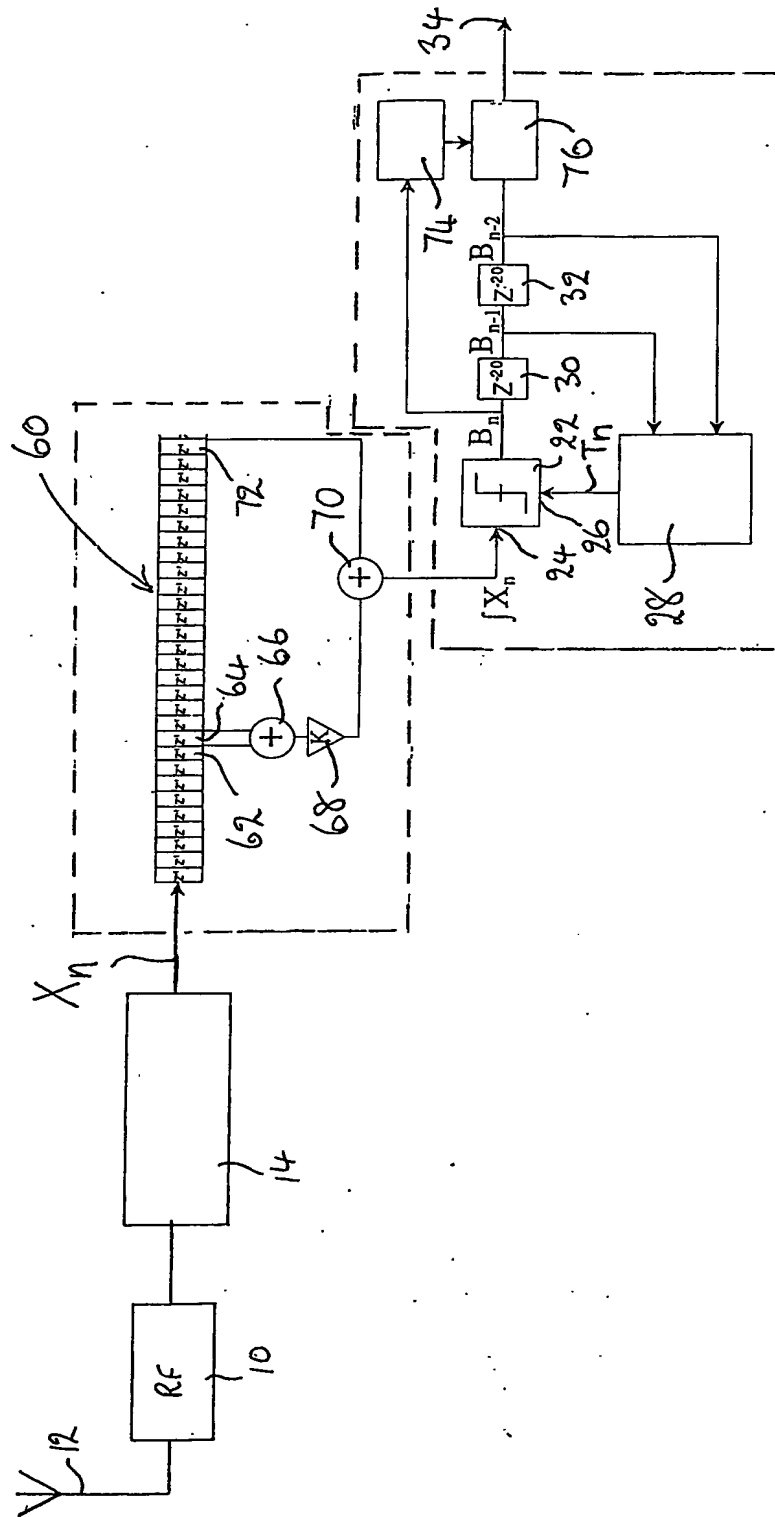


FIG. 2.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**